


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 25 TOWNSHIP 17 RANGE 2  
DATE: 6-2-04  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Broken Harrison 3" down  
METHOD OF ESTABLISHMENT: County: 10-15-98

IN. S.P.C. E ZONE NAD '83  
NAME: 17022504  
N: 515350.1830(m)  
E: 49264.9470(m)

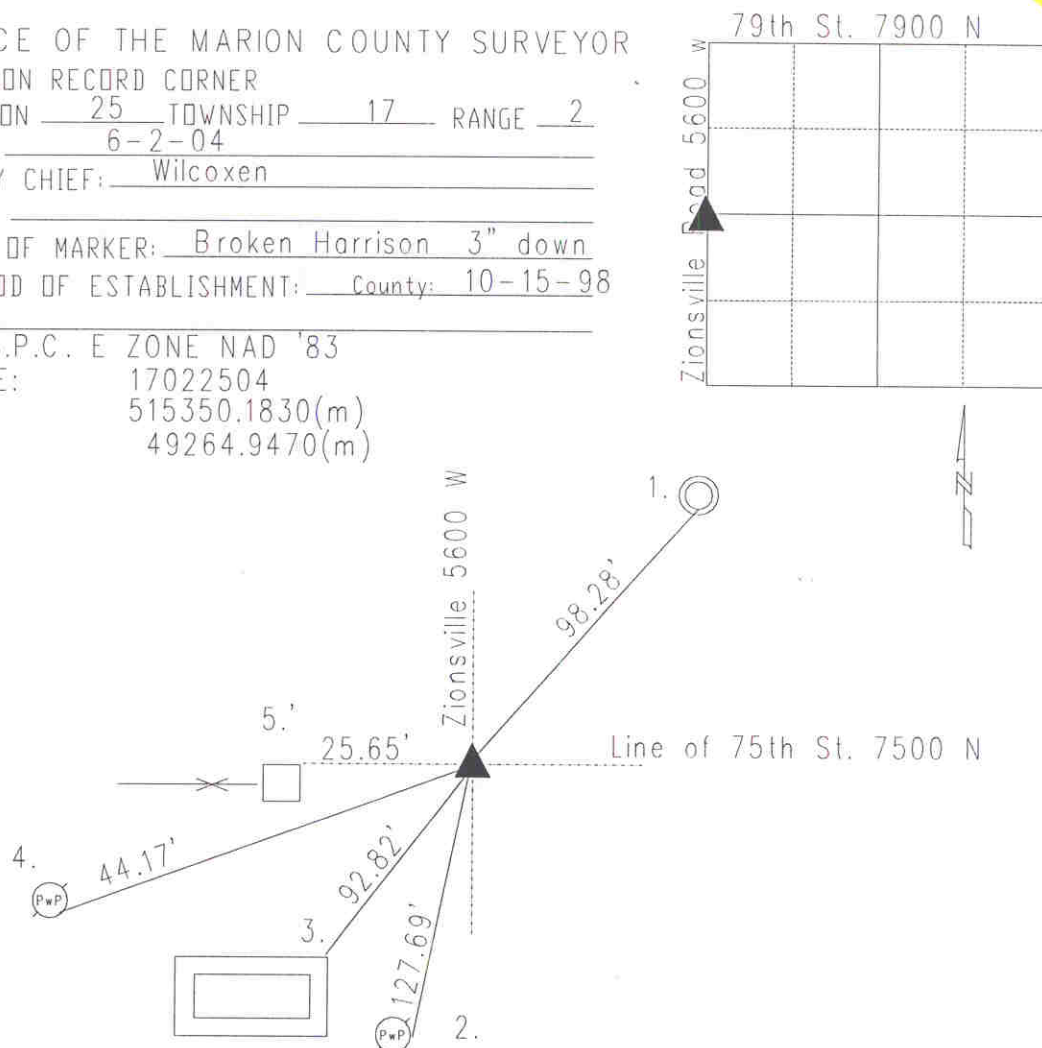

Original post set 1821 by Laughlin with witnesses: 8" ironwood N 61 W 5 links; 6" buckeye S 4 W 21 links per Marion County Atlas pg. 4. Survey by D.B. Hosbrook 10-15-1852 called no stone but witness, 20" oak N 5 W 50 links and 7" elm N 71 1/2 W 25 links per Pike Township Legal Survey Book pg. 22. Survey by H.B. Fatout 5-5-1875 called rock formerly set with witness 20" oak N 5 W 50 links 7" elm N 71 1/2 W 25 links per Pike Twp. pg. 22. Burres 1-23-64 called stone. Straber 11-8-71 called PK nail. Miller 5-7-75 called railroad spike. Greene 6-16-86 called railroad spike. Wilcoxon 11-17-86 called same. Wilcoxon 3-24-92 called same. Wilcoxon 5-4-93 called same. Excavated 10-15-98 railroad spike fd 6" dn. RR spike was also fd 12" dn. A bolt w/washer fd 18" dn. No stone fd. Harrison set in position of corner. Re-tied 6-2-04.

REF.	DISTANCE	DESCRIPTION
1.	98.28'	Cut 'x' S-end rim sewer
2.	127.69'	Mag nail w/brass washer E PwP#523-255A 18"up
3.	92.82'	NE corner of parking lot
4.	44.17'	PK nail S PwP#280-255A 8"up
5.	25.65'	Mag nail w/brass washer NE corner fence post 12"up